


2041A MULTI-PRODUCT CALIBRATOR

25ppm MULTI-PRODUCT CALIBRATOR



EXTENDED SPECIFICATIONS

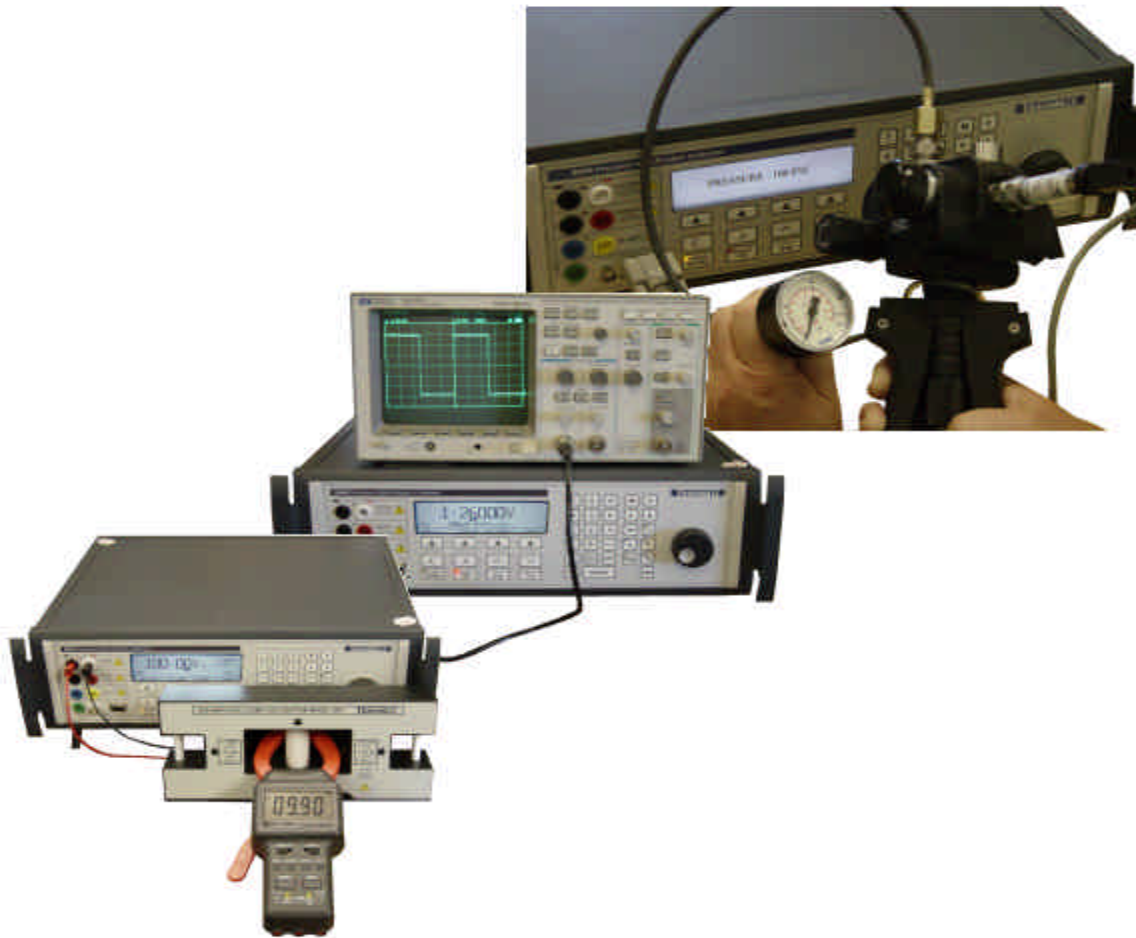

TRANSMILLE LTD., UNIT 13 WOODFALLS INDUSTRIAL ESTATE, LADDINGFORD, KENT. ME18 6DA. UK.
www.transmille.com : sales@transmille.com : Tel : +44 (0) 1622 873334 : Fax : +44 (0) 1622 871488

2041A General Specifications

TRANSMILLE
Solutions In Calibration

Warm Up Time	Double the time since last used up to 20 minutes maximum	
Standard Interfaces	RS232	
Optional Interfaces	GPIB (IEEE-488) : USB (Universal Serial Bus)	
Temperature Performance	Storage : -5°C to +60°C Operation : 0°C to +50°C	
Relative Humidity	Operation : <80% to 30°C, <70% to 40°C, <40% to 50°C Storage : <95%, non-condensing	
Altitude	Operation : 3000m (10,000ft) Maximum Transit : 12000m (40,000ft) Maximum	
EMC & Safety	The calibrator line input plug must be earthed See D.O.C for full details	
Line Power	Line Voltage Selectable : 110V / 230V Line Frequency : 50Hz to 60Hz Line Voltage Variation : -6% +10%	
Power Consumption	28 Watts (Standby)	200 Watts (Maximum)
Low Analogue Isolation	100V	
Connections	Voltage / 2 Wire Resistance Low Current (<=2A) High current (>2A) Earth Connection Oscilloscope Functions Feature (Ext. Pod) RS232 Interface	1x Black : 1x White 4mm Safety sockets 1x Black : 1x Red 4mm Safety sockets 1x Blue : 1x Yellow 4mm Safety sockets 1x Green 4mm Safety Socket 1x BNC terminal 1x Female 'D' type socket 1x Female 'D' type socket
RS232 Settings	Baud Rate Parity Data Bits Stop Bits	9600 None 8 1
Display Information	Type Viewing Area Resolution Backlight Type Brightness	Backlit Black on white film STN type 124.3mm * 34mm 256 * 94 dots Cold fluorescent lamp 70 to 90 cd/m ²
Indicators	Voltage / Current / High Current Negative to ground Oscilloscope Feature Connector (Ext. Pod)	Red LED (between terminals) Green LED (left of Earth terminal) Green LED (right of BNC Connector) Green LED (right of 'D' type connector)
Keyboard	Membrane type with tactile feedback	
Fuses	Mains Inlet	3A A/S (240 Volt) 5A A/S (110 Volt operation)
Isolation	Outputs are opto-isolated from mains earth and the RS-232 interface Maximum common mode voltage between earth and the low terminals 30 Volts ac/dc.	
Dimensions & Weights	Calibrator Only Calibrator in Shipping Box Calibrator in Soft Carry Case Calibrator in Hard Transit case	14cm x 43cm x 46cm : 12.5kgs 58cm x 56cm x 37cm : 15kgs 49cm x 50cm x 19cm : 13.5kgs 55cm x 56cm x 26cm : 22kgs
Warranty Period	3 Years (Parts & Labour)	
Recommended Service Interval	1 Year	
Supplied Connections	1x Serial Interface Connection 1x Adaptor Connection Lead (if at least one adaptor ordered)	
Optional Lead Set Kit	1x Voltage connection leadset 1x Low Current connection leadset 1x High current connection leadset 1x AC connection leadset	
Mounting Kit (optional)	3U rack mount kit	
Case Colour	Matt Dark Grey (RAL7016)	

Due to continuous development specifications may be subject to change.

DECLARATION OF CONFORMITY CE

Manufacturer's Name: Transmille Ltd.
Manufacturer's Address: Unit 13, Woodfalls Ind. Estate
Gravelly Ways
Laddingford
ME18 6DA

Declares, that the product

Product Name: Multi-product Calibrator
Model Number: 2050 / 2041A / 2006A
Product Options: This declaration covers all options of the above product(s)

Conforms with the following European Directives:

The product herewith complies with the requirements of the Low Voltage Directive 73/73EEC and the EMC Directive 89/336/EEC (including 93/68/EEC) and carries the CE Marking accordingly

Conforms with the following product standards:

EMC

Standard

Limit

IEC616326-1:1997+A1:1998 / EN 61326-1:1997+A1:1998 EN55011:1991

IEC 61000-4-2:1995+A1:1998 / EN 61000-4-2:1995

Group 1 Class A

IEC 61000-4-3:1995 / EN 61000-4-3:1995

4kV CD, 8kV AD

IEC 61000-4-4:1995 / EN 61000-4-4:1995

3 V/m, 80-1000 MHz

IEC 61000-4-5:1995 / EN 61000-4-5:1995

0.5kV signal lines, 1kV power lines

IEC 61000-4-6:1996 / EN 61000-4-6:1996

0.5kV line-line, 1kV line-ground

IEC 61000-4-11:1994 / EN 61000-4-11:1994

3V, 0.15-80 MHz 1 cycle, 100%

Dips: 30% 10ms; 60% 100ms

Interrupt > 95% @ 5000ms

SAFETY

IEC 61010-1:1990+A1:1992+A2:1995 / EN 61010-1:1993+A2:1995

12/12/2001



Revision No: 1.1

Managing Director

Date :12/12/2001

General Specifications

Range	Resolution	Max. Burden Current ¹	Output Resistance	Overload Protection
0-202mV	0.1uV	1mA ²	50 Ohms	20 V
0.2-2.02V	1uV	50mA	0.2 Ohms	150V
2-20.2V	10uV	50mA	0.2 Ohms	150V
20-202V	100uV	10mA ³	0.5 Ohms	1200V
200-1020V	1mV	10mA ³	0.7 Ohms	1200V

Accuracy Relative to Calibration Standards Specifications

Range	24 Hour Stability		Noise ⁴ 1Hz to 10Hz	90 day Rel		180 Day Rel		1 year Rel		2 year Rel	
	ppm Set	Rng		ppm Set	Rng	ppm Set	Rng	ppm Set	Rng	ppm Set	Rng
0-202mV	2	+ 1	60nV	24	+ 3	27	+ 3	30	+ 3	42	+ 4.2
0.2-2.02V	2	+ 1	280nV	24	+ 3	27	+ 3	30	+ 3	42	+ 4.2
2-20.2V	2	+ 1	2.5uV	20	+ 3	22.5	+ 3	25	+ 3	35	+ 4.2
20-202V	3.5	+ 1	50.7uV	24	+ 3	27	+ 3	30	+ 3	42	+ 4.2
200-1020V	5	+ 2	280uV	24	+ 6	27	+ 6	30	+ 6	42	+ 8.4

All specifications allow 3uV for lead and thermal emf effects

Notes

Note 1: Current limited by self resetting thermal fuse. Shown as max. current for 10 seconds/continuous operating current

Note 2: Limited by 50 Ohm output impedance

Note 3: Internally adjustable from 2mA to 30mA - Factory set to 10mA as standard

For safety the trip is controlled by a fail-safe circuit independent of the processor which shuts the high voltage output off in the event of an overload.

Note 4: Typical RMS noise figures at 50% of full scale.

High Voltage Safety

High voltage output is ramped to allow instruments to auto range

Standby is automatically activated when setting voltages greater than 20V or 200V from a lower voltage

Standby is automatically selected for high voltage (>20V) after 5 minutes on the same setting

High voltage (> 20V) output is indicated to user through an audible warning beep

An external high voltage output/standby control switch is available as an option

2 Wire output / Remote sensing not available


Isolation : Floating or grounded selection available as standard

Maximum floating voltage : 100V

Specifications apply between 17°C and 27°C.

Outside this range an allowance of 0.18 x 1 Year Spec. per °C should be added.

Due to continuous development specifications may be subject to change.

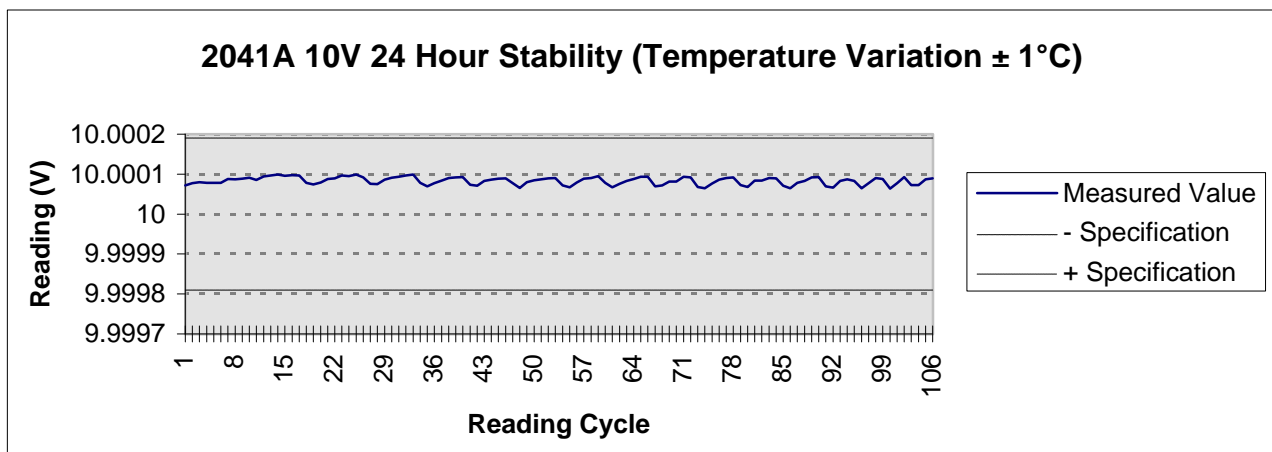

General Specifications

Range	Resolution	Max. Inductive Load	Compliance Voltage	Overload Protection
0-202uA	1nA	10mH	4.2 Volts	150V
0.2-2.02mA	10nA	10mH	4.2 Volts	150V
2-20.2mA	100nA	10mH	4.2 Volts	150V
20-202mA	1uA	10mH	4.2 Volts	150V
0.2-2.02A	10uA	10mH	4.2 Volts	150V
2-20.2A	100uA	10mH	3.9 Volts	150V

Accuracy Relative to Calibration Standards Specifications

Range	Noise ¹ 0.1-1Hz	90 day Rel		180 Day Rel		1 year Rel		2 year Rel	
		%Set	%Rng	%Set	%Rng	%Set	%Rng	%Set	%Rng
0-202uA	180pA	0.008	+ 0.008	0.009	+ 0.008	0.01	+ 0.008	0.014	+ 0.0112
0.2-2.02mA	500pA	0.0064	+ 0.002	0.0072	+ 0.002	0.008	+ 0.002	0.0112	+ 0.0028
2-20.2mA	4nA	0.004	+ 0.002	0.0045	+ 0.002	0.005	+ 0.002	0.007	+ 0.0028
20-202mA	40nA	0.0064	+ 0.002	0.0072	+ 0.002	0.008	+ 0.002	0.0112	+ 0.0028
0.2-2.02A	1uA	0.012	+ 0.002	0.0135	+ 0.002	0.015	+ 0.002	0.021	+ 0.0028
2-20.2A	20uA	0.032	+ 0.002	0.036	+ 0.002	0.04	+ 0.002	0.056	+ 0.0028

All specification +/- 4nA.

Power & temperature sensor on 20A range - microprocessor monitors & protects from overheating
Duty Cycle into 0 Ohms = 90 seconds ON, 5 minutes OFF²

Notes


Note 1 : Typical RMS noise figures at 50% of full scale.

Note 2 : Higher resistance loads allow a longer ON period

Specifications apply between 17°C and 27°C.

Outside this range an allowance of 0.18 x 1 Year Spec. per °C should be added.

Due to continuous development specifications may be subject to change.

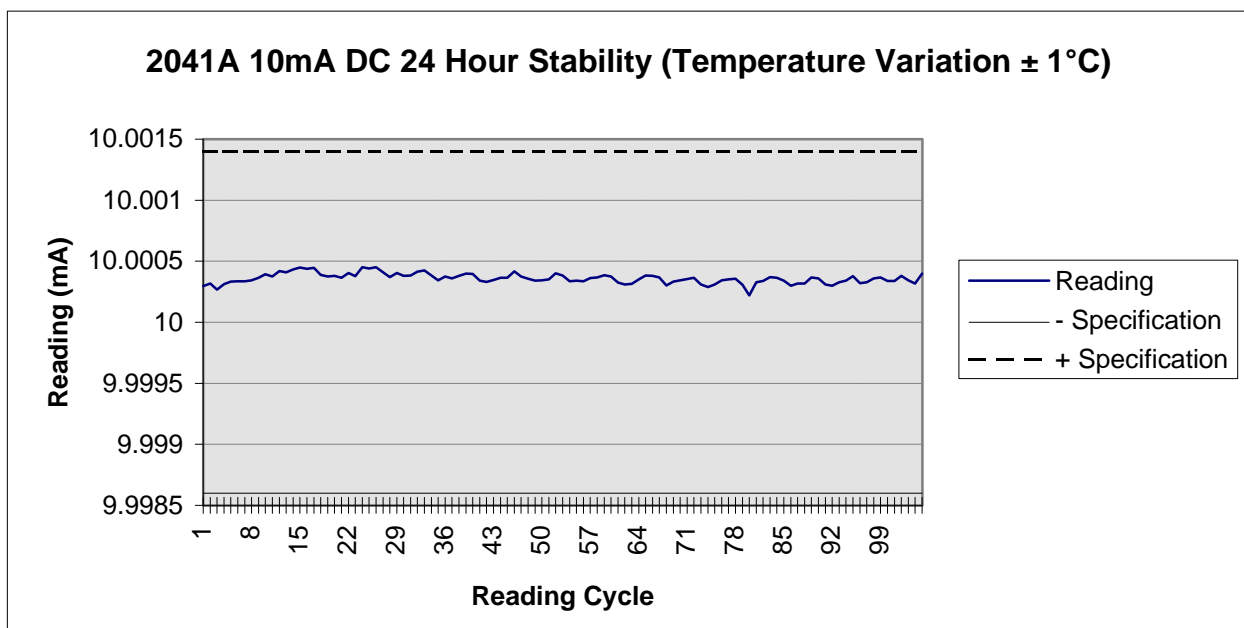

2041A AC Voltage Specifications

General Specifications

Range	Frequency	Resolution	Max. Burden Current ¹	Output Resistance	Overload Protection
0-202mV	10Hz to 30Hz	1uV	1mA ²	50 Ohms	20 V
	30Hz to 1kHz	1uV	1mA ²	50 Ohms	20 V
	1kHz to 10kHz	1uV	1mA ²	50 Ohms	20 V
	10kHz to 40kHz	1uV	1mA ²	50 Ohms	20 V
0.2-2.02V	10Hz to 30Hz	10uV	50mA	0.2Ohms	1200V
	30Hz to 1kHz	10uV	50mA	0.2 Ohms	1200V
	1Hz to 20kHz	10uV	50mA	0.2 Ohms	1200V
	20kHz to 100kHz	10uV	50mA	0.2 Ohms	1200V
2-20.2V	10Hz to 30Hz	100uV	50mA	0.2 Ohms	1200V
	30Hz to 1kHz	100uV	50mA	0.2 Ohms	1200V
	1Hz to 20kHz	100uV	50mA	0.2 Ohms	1200V
	20kHz to 100kHz	100uV	50mA	0.2 Ohms	1200V
20-202V	30Hz to 1kHz	1mV	10mA ³	0.5 Ohms	1200V
	1kHz to 10kHz	1mV	5mA ³	0.5 Ohms	1200V
	10kHz to 20kHz	1mV	2mA ³	0.5 Ohms	1200V
200-1020V	30Hz to 1kHz	33mV	10mA ³	0.7 Ohms	1200V
	1kHz to 10kHz	33mV	2mA ³	0.7 Ohms	1200V

Accuracy Relative to Calibration Standards Specifications

Range	Frequency	Frequency Resolution	90 day Rel		180 Day Rel		1 year Rel		2 year Rel	
			%Set	%Rng	%Set	%Rng	%Set	%Rng	%Set	%Rng
0-202mV	10Hz to 30Hz	1Hz	0.16	+ 0.08	0.18	+ 0.08	0.2	+ 0.08	0.28	+ 0.112
	30Hz to 1kHz	1Hz	0.032	+ 0.01	0.036	+ 0.01	0.04	+ 0.01	0.056	+ 0.014
	1kHz to 10kHz	1Hz	0.048	+ 0.04	0.054	+ 0.04	0.06	+ 0.04	0.084	+ 0.056
	10kHz to 40kHz	1Hz	0.08	+ 0.07	0.09	+ 0.07	0.1	+ 0.07	0.14	+ 0.098
0.2-2.02V	10Hz to 30Hz	1Hz	0.112	+ 0.09	0.126	+ 0.09	0.14	+ 0.09	0.196	+ 0.126
	30Hz to 1kHz	1Hz	0.032	+ 0.01	0.036	+ 0.008	0.04	+ 0.008	0.056	+ 0.011
	1kHz to 20kHz	1Hz	0.072	+ 0.04	0.081	+ 0.04	0.09	+ 0.04	0.126	+ 0.056
	20kHz to 100kHz	1Hz	0.184	+ 0.18	0.207	+ 0.18	0.23	+ 0.18	0.322	+ 0.252
2-20.2V	10Hz to 30Hz	1Hz	0.112	+ 0.09	0.126	+ 0.09	0.14	+ 0.09	0.196	+ 0.126
	30Hz to 1kHz	1Hz	0.024	+ 0.01	0.027	+ 0.008	0.03	+ 0.008	0.042	+ 0.011
	1kHz to 20kHz	1Hz	0.072	+ 0.04	0.081	+ 0.04	0.09	+ 0.04	0.126	+ 0.056
	20kHz to 100kHz	1Hz	0.184	+ 0.18	0.207	+ 0.18	0.23	+ 0.18	0.322	+ 0.252
20-202V	30Hz to 1kHz	1Hz	0.032	+ 0.01	0.036	+ 0.01	0.04	+ 0.01	0.056	+ 0.014
	1kHz to 10kHz	1Hz	0.048	+ 0.04	0.054	+ 0.04	0.06	+ 0.04	0.084	+ 0.056
	10kHz to 20kHz	1Hz	0.08	+ 0.05	0.09	+ 0.05	0.1	+ 0.05	0.14	+ 0.070
200-1020V	30Hz to 1kHz	1Hz	0.032	+ 0.02	0.036	+ 0.02	0.04	+ 0.02	0.056	+ 0.028
	1kHz to 10kHz	1Hz	0.12	+ 0.1	0.135	+ 0.1	0.15	+ 0.1	0.21	+ 0.140

All specifications ± 20uV. All specifications apply from 10% of full scale.

Notes

Note 1: Current limited by self resetting thermal fuse. Shown as max. current for 10 seconds/continuous operating current

Note 2: Limited by 50 Ohm output impedance

Note 3: Internally adjustable from 2mA to 30mA - Factory set to 10mA as standard

For safety the trip is controlled by a fail-safe circuit independent of the processor which shuts the high voltage output off in the event of an overload.

High Voltage Safety

High voltage output is ramped to allow instruments to auto range

Standby is automatically activated when setting voltages greater than 20V or 200V from a lower voltage

Standby is automatically selected for high voltage (>20V) after 5 minutes on the same setting

High voltage (> 20V) output is indicated to user through an audible warning beep

An external high voltage output/standby control switch is available as an option

2 Wire output / Remote sensing not available

Maximum floating voltage : 100V

Isolation : Floating or grounded selection available as standard

Specifications apply between 17°C and 27°C.

Outside this range an allowance of 0.18 x 1 Year Spec. per °C should be added.

Due to continuous development specifications may be subject to change.

General Specifications

Range	Frequency	Resolution	Maximum Burden Voltage	Overload Protection	Inductive Load
20-202uA	10Hz to 2kHz	1nA	3 Volts	150V	5mH
0.2-2.02mA	10Hz to 10kHz	10nA	3 Volts	150V	5mH
2-20.2mA	10Hz to 10kHz	100nA	3 Volts	150V	5mH
20-202mA	10Hz to 2kHz	1uA	3 Volts	150V	5mH
0.2-2.02A	30Hz to 2kHz	10uA	3 Volts	150V	5mH
2-20.2A	30Hz to 500Hz	100uA	2.8 Volts	150V	0.8mH

All specifications +/- 650nA. All specifications apply from 10% of full scale.

Settling Time: For 50% change in output: Less than 3 second from standby to within spec

Inductive Loads: Up to 1H may be connected without additional protection.

High current output is limited to a maximum of 2 Mins.

Accuracy Relative to Calibration Standards Specifications

Range	Frequency	Frequency Resolution	90 day Rel		180 Day Rel		1 year Rel		2 year Rel	
			%Set	%Rng	%Set	%Rng	%Set	%Rng	%Set	%Rng
20-202uA	10Hz to 30Hz	1Hz	0.16	+ 0.08	0.18	+ 0.08	0.2	+ 0.08	0.28	+ 0.112
	30Hz to 1kHz	1Hz	0.072	+ 0.02	0.081	+ 0.02	0.09	+ 0.02	0.13	+ 0.028
	1kHz to 2kHz	1Hz	0.8	+ 0.2	0.9	+ 0.2	1	+ 0.2	1.4	+ 0.28
0.2-2.02mA	10Hz to 30Hz	1Hz	0.16	+ 0.08	0.18	+ 0.08	0.2	+ 0.08	0.28	+ 0.112
	30Hz to 1kHz	1Hz	0.072	+ 0.01	0.081	+ 0.01	0.09	+ 0.01	0.13	+ 0.014
	1kHz to 10kHz	1Hz	0.32	+ 0.1	0.36	+ 0.1	0.4	+ 0.1	0.56	+ 0.14
2mA-20.2mA	10Hz to 30Hz	1Hz	0.16	+ 0.08	0.18	+ 0.08	0.2	+ 0.08	0.28	+ 0.112
	30Hz to 1kHz	1Hz	0.072	+ 0.01	0.081	+ 0.01	0.09	+ 0.01	0.13	+ 0.014
	1kHz to 10kHz	1Hz	0.32	+ 0.1	0.36	+ 0.1	0.4	+ 0.1	0.56	+ 0.14
20-202mA	10Hz to 30Hz	1Hz	0.16	+ 0.08	0.18	+ 0.08	0.2	+ 0.08	0.28	+ 0.112
	30Hz to 1kHz	1Hz	0.072	+ 0.01	0.081	+ 0.01	0.09	+ 0.01	0.13	+ 0.014
	1kHz to 2kHz	1Hz	0.32	+ 0.1	0.36	+ 0.1	0.4	+ 0.1	0.56	+ 0.14
200-2.02A	30Hz to 1kHz	1Hz	0.072	+ 0.01	0.081	0.01	0.09	0.01	0.13	+ 0.014
	1kHz to 2kHz	1Hz	0.56	+ 0.2	0.63	0.2	0.7	0.2	0.98	+ 0.28
2-20.2A	30Hz to 500Hz	1Hz	0.08	+ 0.01	0.09	+ 0.01	0.1	+ 0.01	0.14	+ 0.014

Power & temperature sensor on 20A range - microprocessor monitors & protects from overheating
Duty Cycle into 0 Ohms = 90 seconds ON, 5 minutes OFF¹

Notes

Note 1 : Higher resistance loads allow a longer ON period

Specifications apply between 17°C and 27°C.

Outside this range an allowance of 0.18 x 1 Year Spec. per °C should be added.

Due to continuous development specifications may be subject to change.

For the highest possible accuracy and dependability of the measured value, regardless of the measurement technique used, the 2000 Series calibrators use passive standard resistors, the calibrated value of which is displayed when selected.

General Specifications

Range	Maximum Current	Maximum Voltage
0Ω	0.5A	-
0.1Ω	200mA	2 Volts
1Ω	200mA	2 Volts
10Ω	100mA	5 Volts
100Ω	50mA	5 Volts
1kΩ	10mA	10 Volts
10kΩ	3mA	30 Volts
100kΩ	1mA	100 Volts
1MΩ*	0.1mA	100 Volts
10MΩ*	10uA	100 Volts
100MΩ*	1uA	100 Volts
1GΩ*	100nA	100 Volts

* 2-Wire only

Accuracy Relative to Calibration Standards Specifications

Range	90 day Rel %	180 Day Rel %	1 year Rel %	2 year Rel %
0Ω	-	-	-	-
0.1Ω	0.012	0.0135	0.015	0.021
1Ω	0.008	0.009	0.01	0.014
10Ω	0.008	0.009	0.01	0.014
100Ω	0.004	0.0045	0.005	0.007
1kΩ	0.0032	0.0036	0.004	0.0056
10kΩ	0.0032	0.0036	0.004	0.0056
100kΩ	0.0032	0.0036	0.004	0.0056
1MΩ	0.008	0.009	0.01	0.014
10MΩ	0.028	0.0315	0.035	0.049
100MΩ	0.24	0.27	0.3	0.42
1000MΩ	0.8	0.9	1	1.4

For 4-Wire connection allow 1mW on all resistance specifications.

For 2-Wire connection allow 40mW on all resistance specifications.

The 2 and 4 Wire value for each resistor is calibrated. The 2-Wire value is measured at the terminals
The 4-Wire values are taken using the zero position to NULL the measuring system.

Specifications apply between 17°C and 27°C.

Outside this range an allowance of 0.18 x 1 Year Spec. per °C should be added.

Due to continuous development specifications may be subject to change.

For the highest possible accuracy and dependability of the measured value, regardless of the measurement technique used, the 2000 Series calibrators use passive standard capacitors, the calibrated value of which is displayed when selected.

General Specifications

Range	Maximum Voltage	D	R _s
1nF	50V	0.006	N/A
10nF	50V	0.006	N/A
20nF	50V	0.006	N/A
50nF	50V	0.006	N/A
100nF	50V	0.006	N/A
1uF	30V	0.002	N/A
10uF	20V	0.014	0.2Ω
100uF	10V	0.1	0.15Ω

Specifications apply at 1kHz. Allow 20pF for lead effects.
No appreciable variation is noticeable in value above 1kHz.

Accuracy Relative to Calibration Standards Specifications

Range	90 day Rel %	180 Day Rel %	1 year Rel %	2 year Rel %
1nF	0.2	0.225	0.25	0.35
10nF	0.2	0.225	0.25	0.35
20nF	0.2	0.225	0.25	0.35
50nF	0.2	0.225	0.25	0.35
100nF	0.2	0.225	0.25	0.35
1uF	0.32	0.36	0.4	0.56
10uF	0.48	0.54	0.6	0.84
100uF	0.64	0.72	0.8	1.12

Measurement methods

C_p up to 1uF
C_s from 1uF to 10uF

Capacitance is calibrated as value at the terminals
ie. displayed value incorporates capacitance of circuit up to and including the terminals

Specifications apply between 17°C and 27°C.

Outside this range an allowance of 0.18 x 1 Year Spec. per °C should be added.

Due to continuous development specifications may be subject to change.